

Keysight Technologies

E3640A – E3649A

Programmable DC Power Supplies

Data Sheet



Reliable Power, Repeatable Results

- Single and dual outputs
- Dual range output
- 30 W to 100 W output power
- Front and rear output terminals
- Over-voltage protection
- Remote Sensing
- GPIB and RS-232 standard
- Save and recall functions

Great Performance, Outstanding Price

With the output power of 30 to 100 W, the Keysight Technologies, Inc. E364xA Series programmable DC power supplies provide great performance at a great price. All ten models deliver clean power, excellent regulation, fast transient response and built-in GPIB and RS-232 interfaces. They are designed to meet the needs of R&D design verification, production testing, QA verifications, and other demanding applications with Keysight Technologies's quality and reliability.

Steady Output

With 0.01 percent load and line regulation, Keysight E364xA power supplies are able to maintain a steady output when power line and load changes occur. They also specify normal mode voltage noise and low common mode current noise. The low normal mode noise specification assures clean power for precision circuitry applications, and the low common mode current provides isolation from power line current injection. Keysight E364xA power supplies specify less than 90 msec of voltage settling time at any output load condition.



Remote Interface

Keysight E364xA power supplies support any PC with a GPIB (IEEE-488) card or RS-232 interface. Every model ships standard with both GPIB and RS-232. The easy-to-use SCPI (Standard Commands for Programmable Instruments) allow fast and simple programming procedures. Besides, the user manual provides sufficient information on programming for all end users, from beginners to veterans.

Broad Support

VXI plug and play software drivers are available for Keysight VEE, National Instruments LabView and LabWindows. With these drivers, integration of the E364xA into your system can never be any easier. The drivers are supported under Microsoft Windows 98 and NT.


Front Panel Operation

An easy-to-use rotary knob and self-guiding keypads allow you to set the output at your desired resolution without any effort. Also, both voltage and current levels can be set to a maximum resolution of 10 mV/ 1 mA from the front panel. In addition, you can store and recall for up to five complete power supply setups using the internal non-volatile memory.


The output on/off button sets the output to zero. If you own a dual output model, you can view two voltages or currents that are displayed simultaneously.

Versatile Power

Keysight E364xA power supplies give you the flexibility to select from dual output ranges. Output load is protected against overvoltage, which can be easily monitored and adjusted from the front panel and remote interface. Remote sensing is available in the rear terminal to eliminate errors caused by voltage drops on the load leads. These power supplies offer new versatile binding posts on the front panel and screw-type terminals on the rear panel. New front panel binding posts allow you to use safety test leads as well as conventional banana clips and stripped wires. An optional rackmount kit is available. The Keysight E364xA Series employs a cooling fan with automatic speed control to reduce the acoustic noise.

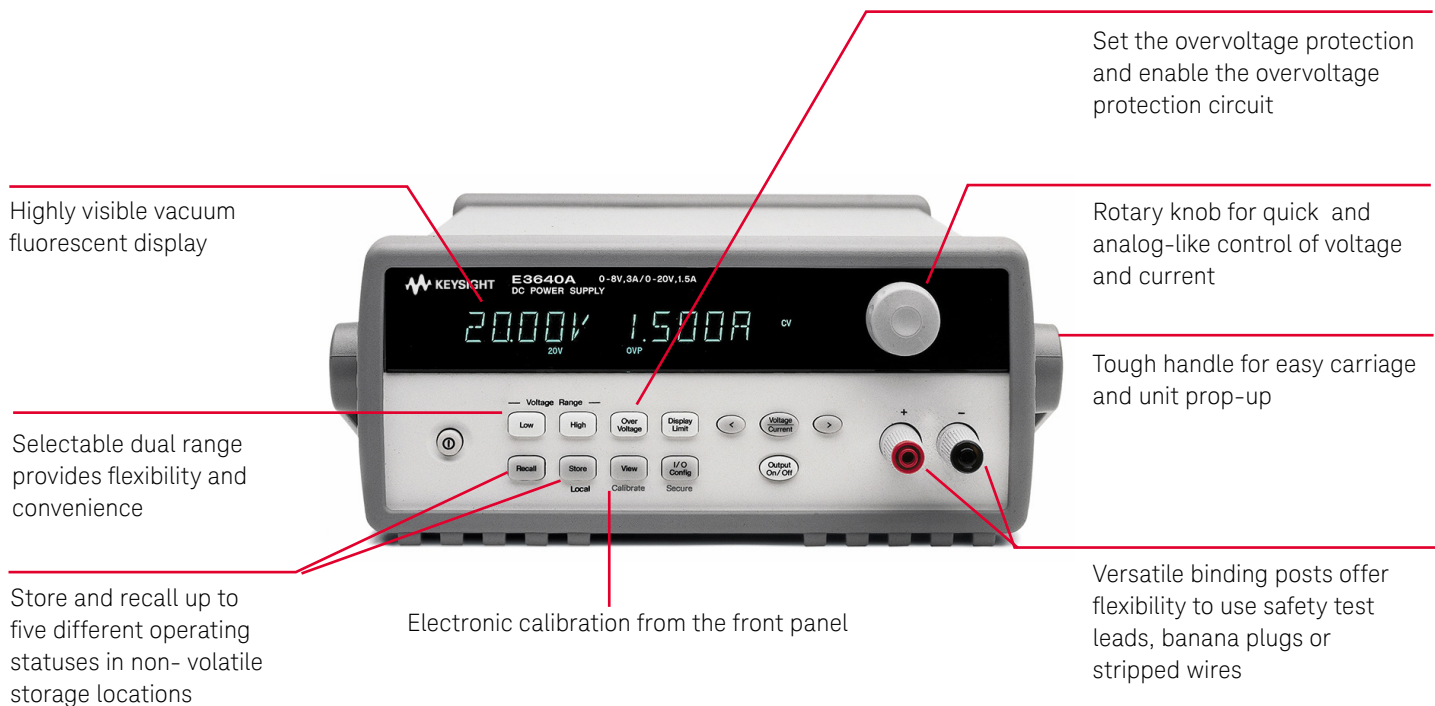

1 year warranty protects your investment

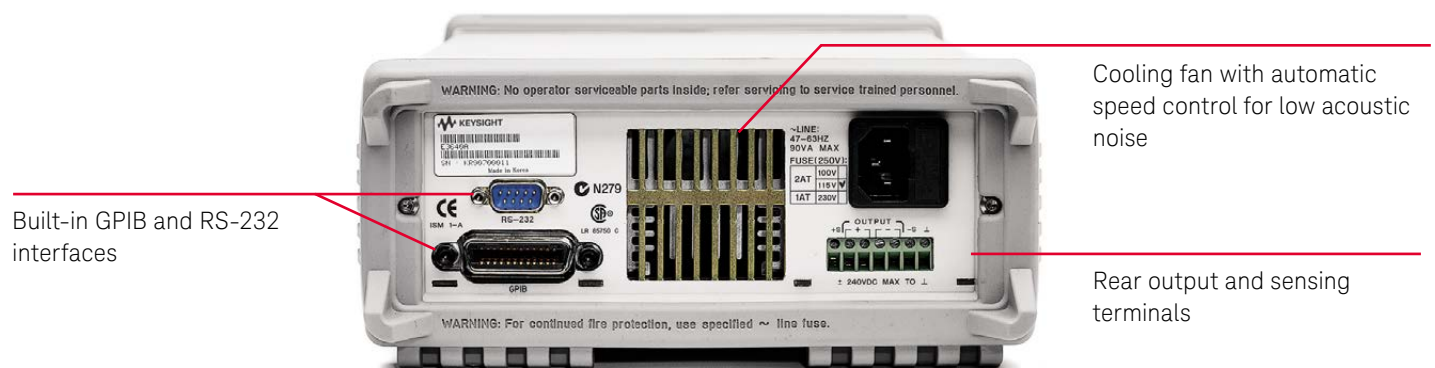

Keysight E3640A – E3649A Programmable DC Power Supply Specifications

Model number	E3640A	E3641A	E3642A	E3643A	E3644A	E3645A
Maximum power	30 W		50 W		80 W	
# of outputs	1	1	1	1	1	1
DC output rating (@ 0 °C to 40 °C)	0 to 8 V/3 A or 0 to 20 V/1.5 A	0 to 35 V/0.8 A or 0 to 60 V/0.5 A	0 to 8 V/5 A or 0 to 20 V/2.5 A	0 to 35 V/1.4 A or 0 to 60 V/0.8 A	0 to 8 V/8 A or 0 to 20 V/4 A	0 to 35 V/2.2 A or 0 to 60 V/1.3 A
Net weight	5.3 kg	5.2 kg	6.3 kg	6.2 kg	6.6 kg	6.7 kg
Dimensions (without bumper)	212.6 mm W x 88.5 mm H x 348.3 mm D					

Model number	E3646A	E3647A	E3648A	E3649A
Maximum power	60 W		100 W	
# of outputs	2	2	2	2
DC output rating (@ 0 °C to 40 °C)	Two 0 to 8 V/3 A or 0 to 20 V/1.5 A	Two 0 to 35 V/0.8 A or 0 to 60 V/0.5 A	Two 0 to 8 V/5 A or 0 to 20 V/2.5 A	Two 0 to 35 V/1.4 A or 0 to 60 V/0.8 A
Net weight	8.2 kg	8.0 kg	9.2 kg	9.1 kg
Dimensions (without bumper)	212.8 mm W x 133.0 mm H x 348.3 mm D			

Load and line regulation ± (% of output + offset)	
Voltage	< 0.01% + 3 mV
Current	< 0.01% + 250 µA
Ripple and noise (20 Hz to 20 MHz)	
Normal mode voltage	< 5 mVpp/0.5 mVrms for 8 V/20 V models < 8 mVpp/1 mVrms for 35 V/60 V models
Normal mode current	< 4 mArms
Common mode current	< 1.5 µArms
Accuracy ¹ 12 months (@ 25 °C ± 5 °C), ± (% output + offset)	
Programming	
Voltage	< 0.05% + 10 mV (< 0.1% + 25 mV for output 2 of E3646/47/48/49 A)
Current	< 0.2% + 10 mA
Readback (over GPIB and with respect to actual output)	
Voltage	< 0.05% + 5 mV (< 0.1% + 25 mV for output 2 of E3646/47/48/49 A)
Current	< 0.15% + 5 mA (< 0.15% + 10 mA for output 2 of E3646/47/48/49 A)
Meter ² (over front panel with respect to actual output)	
Voltage	< 0.05% + 2 counts (< 0.1% + 4 counts for output 2)
Current	< 0.15% + 5 mA (< 0.15% + 10 mA for output 2)
Resolution	
Program	< 5 mV/1 mA
Readback	< 2 mV/1 mA
Meter	10 mV/1 mA
Transient response	Less than 50 µsec for output to recover to within 15 mV following a change in output current from full load to half load or vice versa.
Settling time ³	< 90 msec
OVP	
Accuracy, ± (% output + offset)	< 0.5% + 0.5 V
Activation time ⁴	< 1.5 msec, OVP ≥ 3 V/< 10 msec, OVP < 3 V

1. Accuracy specifications are valid after a 1-hour warm-up with no load and calibration at 25 °C.
2. Meter accuracy specification is at minimum 10 mV decimal limited by front panel resolution.
3. Maximum time required for the output voltage to change from 1% to 99% or vice versa following the receipt of VOLTage or APPLy command via direct GPIB or RS-232 interface.
4. Average time for output to start and drop after an OVP condition occurred.

Temperature coefficient per °C ± (% output + offset)	
Voltage	< 0.01% + 3 mV (< 0.02% + 5 mV for output 2 of E3646/47/48/49A)
Current	< 0.02% + 3 mA
Stability, constant load & temperature ± (% output + offset), 8 hrs	
Voltage	< 0.02% + 2 mV
Current	< 0.1% + 1 mA
Remote sensing	1 V
Max. voltage drop in each load lead	
AC Input (47 Hz – 63 Hz)	100 Vac ± 10% (Opt 0E9)/115 Vac ± 10% (Std)/230 Vac ± 10% (0E3)
Warranty	One year for E364xA series power supplies Three months for standard shipped accessories
Product regulation	Designed to comply with UL3111-1; certified to CSA 22.2 No. 1010.1; conforms to IEC 1010-1; complies with EMC directive 89/336/EEC (Group 1, Class A)

Ordering Information

Keysight E364xA Series Power Supplies
E3640A 30-Watt Single Power Supply
E3641A 30-Watt Single Power Supply
E3642A 50-Watt Single Power Supply
E3643A 50-Watt Single Power Supply
E3644A 80-Watt Single Power Supply
E3645A 80-Watt Single Power Supply
E3646A 60-Watt Dual Power Supply
E3647A 60-Watt Dual Power Supply
E3648A 100-Watt Dual Power Supply
E3649A 100-Watt Dual Power Supply

Standard Shipped Accessories

User's & Service guide, Product
Reference CD, AC power cord

Power Options

Opt. 0E3 230 Vac ± 10%
Opt. 0EM 115 Vac ± 10%
Opt. 0E9 100 Vac ± 10%

Other Options

Opt. 1CM Rackmount kit*
– Single Output (P/N 5063-9240)
– Dual Output (P/N 5063-9243)
Opt. 0L2 Extra Manual
Opt. UK6 Commercial calibration with test result data
E3600A-100 Test lead kit

Rackmount Kits*

Keysight E3640A/41A/42A/43A/44A/45A
To rackmount two instruments side-by-side
Lock-link Kit (P/N 5061-9694)
Flange Kit (P/N 5063-9212)
To rackmount one or two instruments in a sliding support shelf
Support Shelf (P/N 5063-9255)
Slide Kit (P/N 1494-0015) required for support shelf
For a single instrument, also order
Filter Panel (P/N 5002-3999)

Keysight E3646A/47A/48A/49A
To rackmount two instruments side-by-side
Lock-link Kit (P/N 5061-9694)
Flange Kit (P/N 5063-9214)
To rackmount two instruments in a sliding support shelf
Support Shelf (P/N 5063-9256)
Slide Kit (P/N 1494-0015)

* Rackmounting with 1CM or lock-link/flange kit requires
Keysight or customer support rails
Keysight Support Rails-E3663AC

MESSBAR MEHR AUSWAHL.

MIT AKTUELLEN PREISEN, PRODUKTHIGHLIGHTS UND ZUBEHÖR.
DER B2B-ONLINESHOP.



STARKE MARKEN. HÖCHSTE PRODUKTVIELFALT. BESTE QUALITÄT.

Schnell und bequem online bestellen – bei dataTec ist das möglich. Bei uns finden Sie die perfekte Lösung für ihre vielfältigen Anforderungen.

Wir bieten eine **unschlagbare Auswahl** an Mess- und Prüfgeräten namhafter Hersteller. Diese reicht von Arbiträr-Funktionsgeneratoren über Logikanalysatoren bis hin zu Stromversorgungen und Stromzangen oder **Oszilloskopen bis 90 GHz Bandbreite**. Hohe Lagerkapazität und kurze Wege sorgen dafür, dass die gewünschte Ware ganz schnell bei Ihnen ist. Bundesweit meist innerhalb eines Tages.

Mehr Klicks, mehr Vorteile:

- Mehrere tausend Mess- und Prüfgeräte
- Tagesaktuelle Preise und Promotions
- Warenkorbrabatt bei Onlinebestellung
- Versandkostenfrei (ab € 80,-)
- Datenblatt-Download
- uvm.


Angebotsanfrage oder Bestellung unter:

www.datatec.de



MESSBAR MEHR BERATUNG.

KOSTENLOS UND UNVERBINDLICH, AM TELEFON ODER VOR ORT.
DIE TECHNISCHEN EXPERTEN.

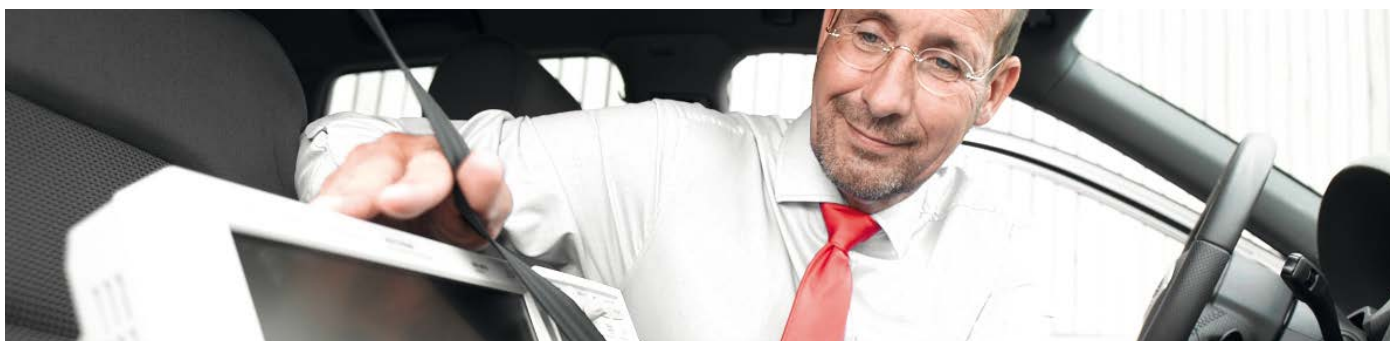

KOMPETENTE BERATUNG VOR UND NACH DEM KAUF.

Haben Sie eine technische Frage zu den Geräten, zum Handling und Bedienung eines Gerätes, zur passenden Software und / oder bei der Auswahl des richtigen Equipments für Ihre Messaufgabe?

Bei uns kümmern sich echte Diplom-Ingenieure, Elektronik- und Elektrotechniker mit **langjähriger Praxiserfahrung** und hoher Kompetenz um Ihr Anliegen. **Kostenlos** berät Sie unser praxiserfahrener und herstellertestifizierter Außendienst direkt **bei Ihnen vor Ort** und / oder führt Ihnen live das gewünschte Mess- und Prüfgerät vor.

Die technischen Experten für:

- Oszilloskope
- Spektrum- / Netzwerkanalysatoren
- Netzgeräte / Stromversorgungen
- Thermografie / Temperatur
- Prüfgeräte VDE / Netzanalyse
- uvm.

Technische Frage oder Termin vereinbaren unter:

07121 / 51 50 50



MESSBAR MEHR WISSEN.

**FORT- UND WEITERBILDUNGEN FÜR IHREN BERUFLICHEN ERFOLG.
DIE DATATEC AKADEMIE.**



SEMINARE IN THEORIE UND PRAXIS.

Der Kauf von Mess- oder Prüfgeräten bei dataTec ist der erste Teil zur Lösung Ihrer Messaufgabe. Ist die Messtechnik beschafft oder bereits vorhanden, steht das Thema Umsetzung in Ihrer täglichen Arbeit an.

Die dataTec Akademie hält Ihr Wissen zu **vielen Bereichen der Messtechnik** stets auf dem neuesten Stand. Nutzen Sie unser vielfältiges Seminarangebot mit renommierten Dozenten und transportieren Sie aktuelles Wissen in Theorie und Praxis in **Ihre tägliche Arbeit**. Modernste Räumlichkeiten und beste technische Ausstattung – um das Erlebnis „Wissen“ angenehm und komfortabel zu begleiten.

Unsere Seminarthemen:

- Thermografie
- Prüfgeräte VDE
- Oszilloskope
- Labormesstechnik
- EMV- / HF-Messtechnik
- uvm.

Alle aktuellen Termine und Preise unter:

www.datatec-akademie.de

